

RENOPASS INTER SYSTEM


Complete house renovation in only 48 hours



- On old paint, TPC and old renders
- On old glass paste or old stoneware (maximum dimensions 2 x 2 cm or 5 x 5 cm)
- No stripping or meshing required
- **EXCLUSIVE** time before finishing 12 hours
- **Easy to apply:** manually or using a machine
- **Wide choice of colours and finishes:** single-layer renders, lime renders, TPC or paint
- **Low consumption:** 1 pallet = 1 house

RENOPASS CHAUX SYSTEM

Healthy and breathable renders for stone, old bricks, adobe, loam, clinker masonry

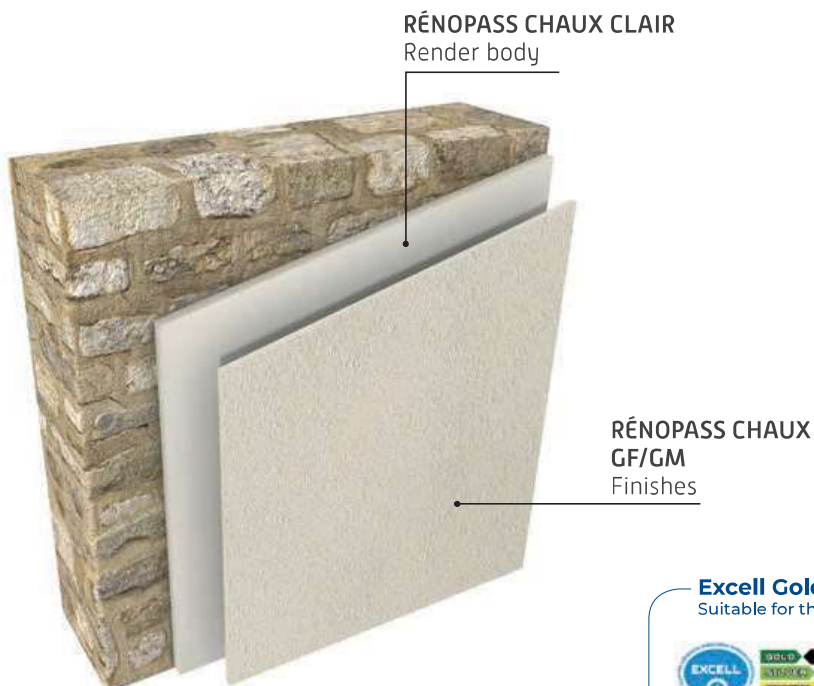

- 60 colours available (adapted to regional architectural specificities)
- Excellent machine passage
- Easy to apply
- Good load bearing capacity

Excell Gold Label™

Suitable for the wine-producing environment



* These products have been awarded the Excell Gold Label for their high quality requirements which exceed applicable regulations on indoor air emissions.

SELECTION GUIDES

ORGANIC AND SILOXANE
BASED DECORATIVE RENDERS

		VERY FINE FLOATED	FINE FLOATED	FINE FLOATED	MEDIUM FLOATED	ROUGH FLOATED	FINE RIBBED
Maximum grading size		0.7 mm	1 mm	1.2 mm	1.6 mm	2 mm	1.6 mm
Consumption		1.5 kg/m ²	2 kg/m ²	2 to 2.5 kg/m ²	2.5 to 3 kg/m ²	2.5 to 3 kg/m ²	2 to 2.5 kg/m ²
Organic decorative render	CREPILOR Pages 80/81	-	-	CRÉPILOR T	CREPILOR TM	CRÉPILOR GT	CREPILOR GF
Organic-mineral decorative render	CREPILANE Pages 82/83	-	-	CRÉPILANE T	CREPILANE TM	-	-
Mineral coating	LITHOCOLOR Pages 84/85	-	-	LITHOCOLOR T	-	-	LITHOCOLOR F
Decorative organic-mineral render	CRÉALANE T Pages 88/89	-	CRÉALANE T	-	-	-	-
Decorative organic-mineral render	CRÉALANE MODELABLE Pages 90/91	CRÉALANE MODELABLE	-	-	-	-	-

Decorative renders **CREPILOR**, **CRÉPILANE** and **LITHOCOLOR** are:

- available in the 680 "Decorative render / Paint" colour chart colours
- for use as a finish for exterior thermal insulation systems **RHÉA 400**, **RHÉATHERM 600**, **RHEATHERM 600 LR**, **RHEATHERM 600 MOB** (only for the 465 colours with a solar absorption coefficient < 0.7)

Decorative renders **CRÉALANE T** and **CREALANE MODELABLE** are:

- available in 611 colours
- for use as a finish for exterior thermal insulation systems **RHÉATHERM 600** and **RHEATHERM 600 LR** (colours with a solar absorption coefficient < 0.7)